



## Driveshaft Measurement Guide

• MEASURE FOR U-JOINT SIZE AT THE THIRD MEMBER YOKE

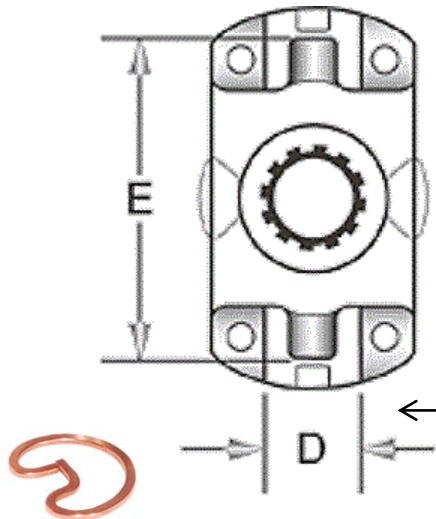

<input type="checkbox"/>	E = 3-7/32"	D = 1-1/8"
<input type="checkbox"/>	E = 3-7/32"	D = 1-1/16"
<input type="checkbox"/>	E = 3-5/8"	D = 1-1/16"
<input type="checkbox"/>	E = 3-5/8"	D = 1-1/8"
<input type="checkbox"/>	E = 3-5/8"	D = 1-3/16"
<input type="checkbox"/>	E = 4-3/16"	D = 1-3/16"
<input type="checkbox"/>	E = 4-3/16"	D = 1-3/8"
<input type="checkbox"/>	E = 4-31/32"	D = 1-3/8"

**OUTSIDE SNAP RINGS**  
**INSIDE SNAP RINGS**

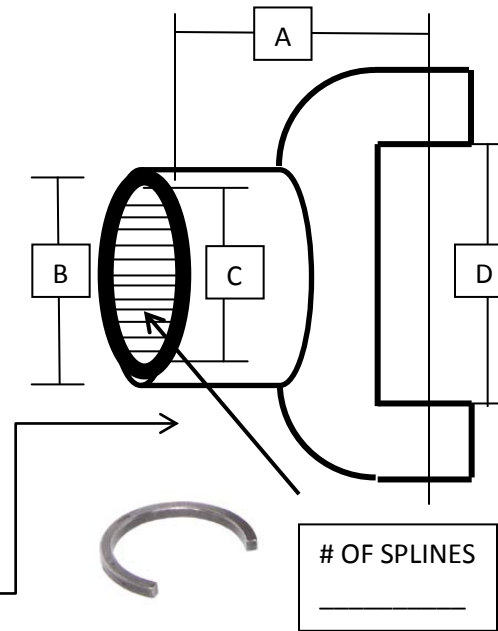

A) LENGTH \_\_\_\_\_

B) SEAL DIA \_\_\_\_\_

C) MAJOR DIA. OF SPLINE \_\_\_\_\_

D) INSIDE OF TABS

2 1/8"

2 5/8"

2 9/16"

# OF SPLINES \_\_\_\_\_


\* THESE DIMENSIONS MUST BE ACCURATE! IF YOU DON'T GET THEM, CHECK FOR WEAR AT "E" OR "A".

"X" measurement is from the tip of the transmission output shaft to the centerline of the u-joint at the third member. This will be the flat surface where the U-bolt is drilled.

"Y" measurement is the length of the Output shaft protrusion.

Transmission Make and Model

Differential Make and Model

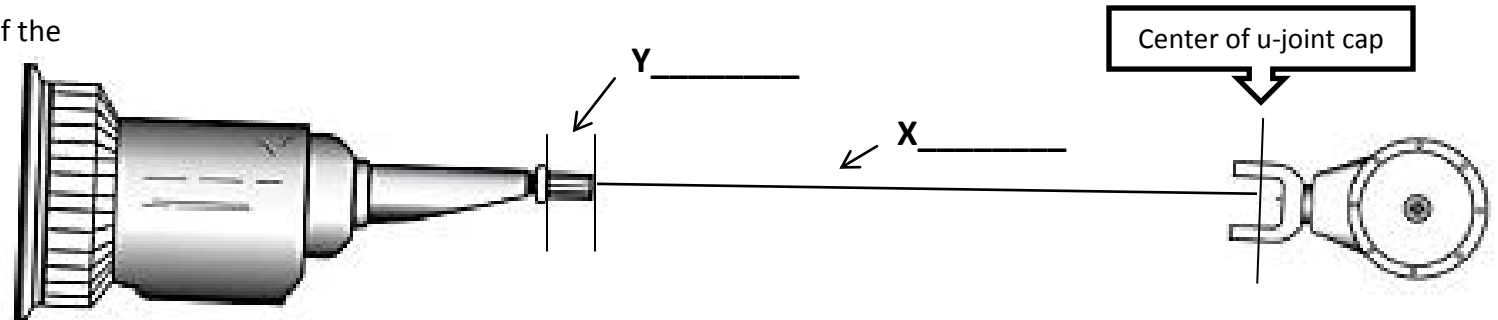

- The vehicle must be measured as it is to operate. Jacking up the vehicle will change your dimensions
- If your vehicle has bolt-on transmission yoke, measure between u-joint centerlines
- If there is a flange mount on either or both ends, measure to its face
- Installing U-bolts, do not over tighten them. "D" dimension 1-1/16 and 1-1/8: 14-17ft lbs.; 1-3/16: 20-24ft lbs.; 1-3/8: 32-37ft lbs.
- IF YOU HAVE ANY QUESTIONS PLEASE FEEL TO CALL US! (320)255-1688; 1-800-825-4569

U-bolt kit

Strap kit

